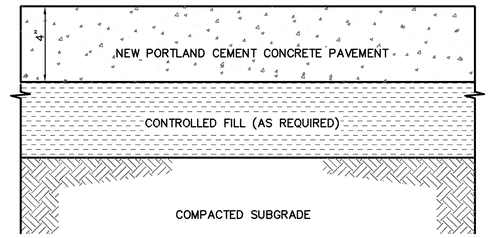



CONTRACTION JOINT (CJ)



EXPANSION JOINT (EJ)



THICKENED EDGE (TE)

NOTE: CONCRETE SLAB IN MECHANICAL YARD SHALL BE 6" THICK AND SHALL BE REINFORCED WITH 6x6 W2.9xW2.9 (WWR)

A SIDEWALK DETAIL
NOT TO SCALE

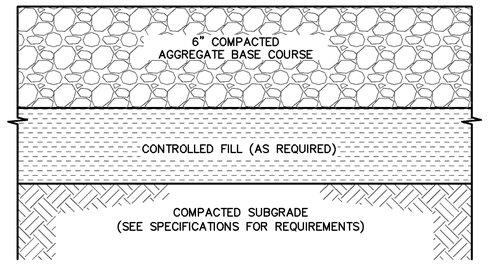

C GRAVEL SECTION DETAIL
NOT TO SCALE



18" STANDARD



18" REVERSED PITCH

NOTES:

1. WHERE SLOPE IS AWAY FROM CURB, USE REVERSED PITCH.
2. WHERE SLOPE IS TOWARDS CURB, USE STANDARD.
3. PLACE CONTRACTION JOINTS AT 10' INTERVALS (5' MIN.)
4. PLACE EXPANSION JOINTS AT 50' MAXIMUM INTERVALS.

D 18" CURB & GUTTER
NOT TO SCALE

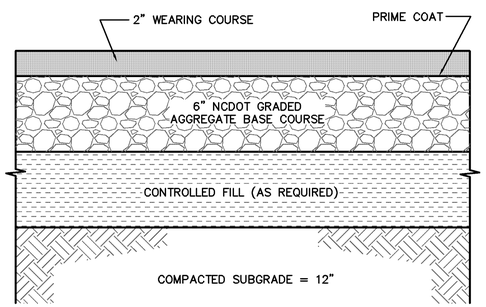

NOTE: WHERE NO CURB & GUTTER, ROLL CURB, SIDEWALK, INTEGRAL CURB & WALK, VERTICAL CURB, OR GRANITE CURB, BASE COURSE SHALL EXTEND 12" PAST EDGE OF PAVEMENT.

B STANDARD ASPHALT PAVEMENT SECTION
NOT TO SCALE

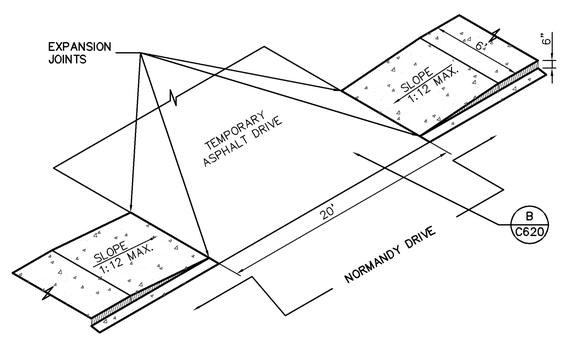

E TEMPORARY HANDICAP RAMP DETAIL
NTS

US ARMY CORPS
OF ENGINEERS
SAVANNAH

SYMBOL	DESCRIPTION	DATE	BY

DESIGNED BY: DBG
DATE: 25 JAN 2010
DWN BY: JDG
CKD BY: LKB
SOLICITATION NO.: W912HN-09-R-0018
SUBMITTED BY: LKB
CONTRACT NO.:
FILE NAME: BRHG-620.DWG
CATEGORY CODE: 730-46-01
SIZE: 34x22
PLOT SCALE: NOT TO SCALE
PLOT DATE:

U. S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH DISTRICT

LS3P ASSOCIATES LTD.
205 ½ KING STREET
CHARLESTON, SC, 29401

ALBRITTON JUNIOR HIGH SCHOOL ADDITION
FT BRAGG NORTH CAROLINA

CIVIL DETAILS
SITE

NORTH CAROLINA PROFESSIONAL SEAL 027779 ENGINEER
LAWRENCE K. BARTHELEMY, IV

PLATE
REFERENCE
NUMBER
C-620
SHEET 16