KEYED NOTES

1. DOORS, WINDOW, FRAME, GLAZING, AND ANCHORAGE TO BE BLAST RESISTANT.
2. NEW FOOTING BY ALUMINUM LANDING/RAMP SYSTEM INSTALLER AS DESIGNED BY SYSTEM MANUFACTURER.
3. REMOVE TEMPORARY RATED WALL & CEILING UPON COMPLETION OF BUILDING ADDITION. REPAIR ALL EXISTING FINISHES DAMAGED BY INSTALLATION / REMOVAL OF TEMPORARY EXIT PASSAGEWAY.
4. EXISTING ALUMINUM WINDOW WITH OPERABLE VENT AND INSULATING GLASS TO BE REMOVED.
5. HM DOOR & FRAME TO BE REMOVED UPON COMPLETION OF ADDITION. NEW ALUMINUM WINDOW TO BE INSTALLED IN EXISITNG OPENING.
6. REMOVE EXISTING PRECAST CONC SILL. UPON COMPLETION OF ADDITION & REMOVAL OF HM DOOR & FRAME, INSTALL NEW CAST STONE SILL.
7. TEMPORARY EXIT SIGN. REMOVE UPON COMPLETION OF ADDITION.
8. CEILING AND LIGHTS AT TEMPORARY CORRIDOR. REMOVE UPON COMPLETION OF ADDITION.

TEMPORARY EXIT DEMOLITION SEQUENCE

UPON COMPLETION OF THE ADDITION, COMPLETE DEMOLITION OF ALL TEMPORARY CONSTRUCTION AS FOLLOWS:

1. REMOVE HOLLOW METAL CASED OPENING FRAME AT E01 AND INSTALL NEW DOOR & HOLLOW METAL FRAME E01P.
2. REMOVE TEMPOARY DUST PARTITION AT EXISTING CORRIDOR E01 AND REWORK ALL EXIT SIGNAGE FOR EGRESS INTO AFTER HOURS LOBBY 101.
3. REMOVE DOOR & HOLLOW METAL FRAME E02, ALUMINUM RAMP & LANDING AND INSTALL NEW CAST STONE SILL & ALUM WINDOW B AT EXISITNG OPENING.
4. REMOVE WALLS & CEILING AT TEMPORARY CORRIDOR E02. RESTORE ALL FINISHES AT TEMPORARY CLASSROOM E03 DAMAGED BY CONSTRUCTION/DEMOLITION.
5. REMOVE GRAVEL PAD AT RAMP AND INSTALL SOD AT AREAS DISTURBED BY RAMP CONSTRUCTION/ DEMOLITION.

GRAPHIC SCALE

0 2' 4' 8' 12'
3/16" = 1'-0"

0 2' 4' 6'
3/8" = 1'-0"

RCP LEGEND

- ONE HOUR FIRE RATED PARTITION
- THREE HOUR RATED FIRE WALL
- 8' - 0" CEILING HEIGHT ABOVE FINISH FLOOR
- ONE HOUR FIRE RATED CEILING
- SURFACE MOUNTED LIGHT FIXTURE
- EXIT SIGN

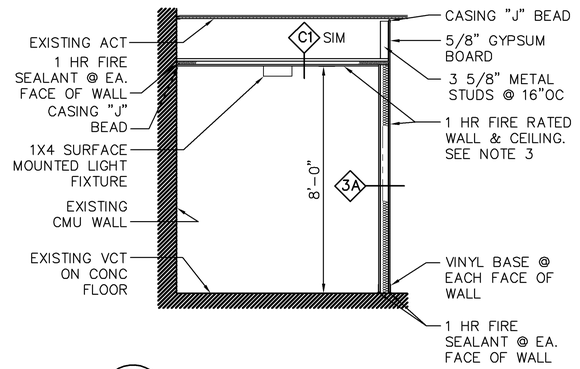

D AD101 A303 A303 — TEMP EXIT PASSAGEWAY SECTION
SCALE: 3/8" = 1'-0"

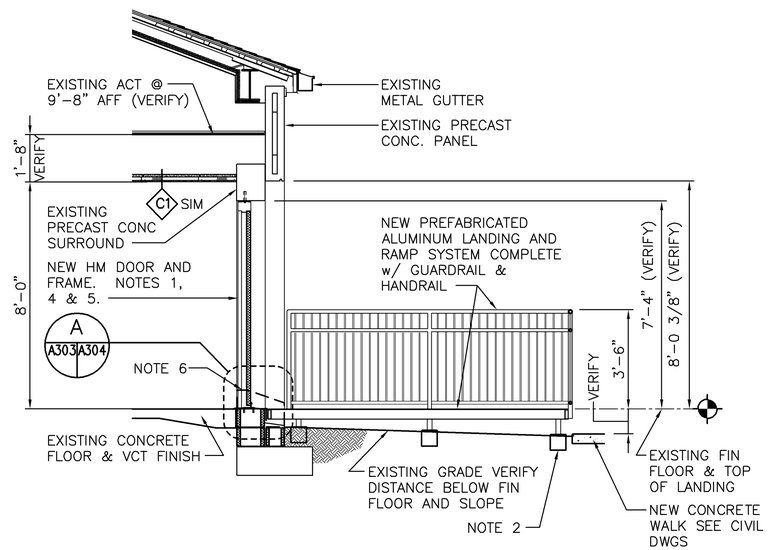

A A303 A303 — EXISTING WINDOW/TEMP EXIT OPENING
SCALE: 3/8" = 1'-0"

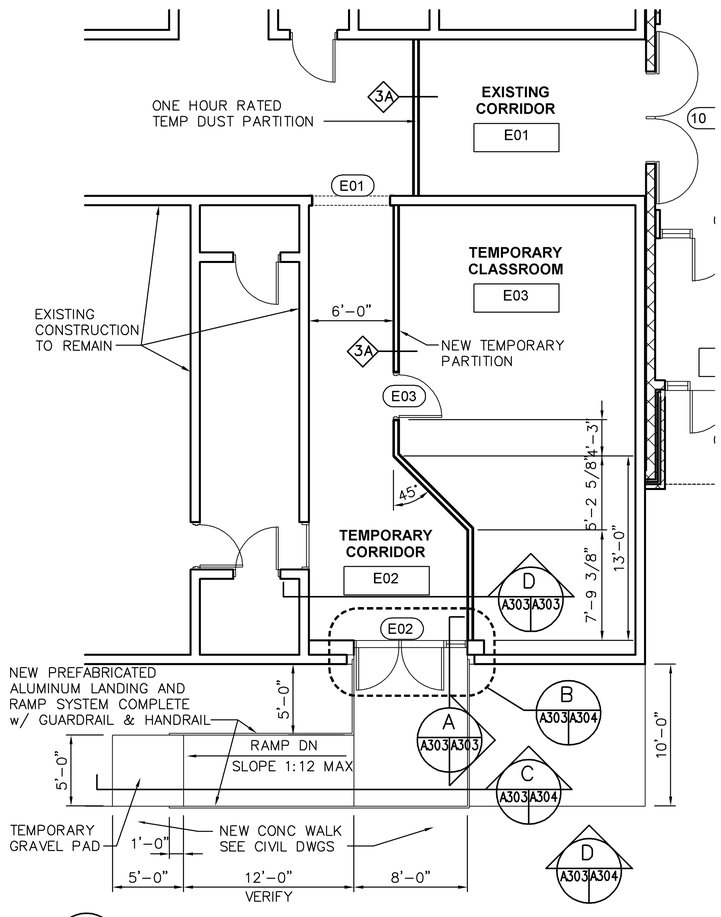

B A101 A303 — TEMP EXIT PASSAGEWAY ENLARGED PLAN
SCALE: 3/16" = 1'-0"

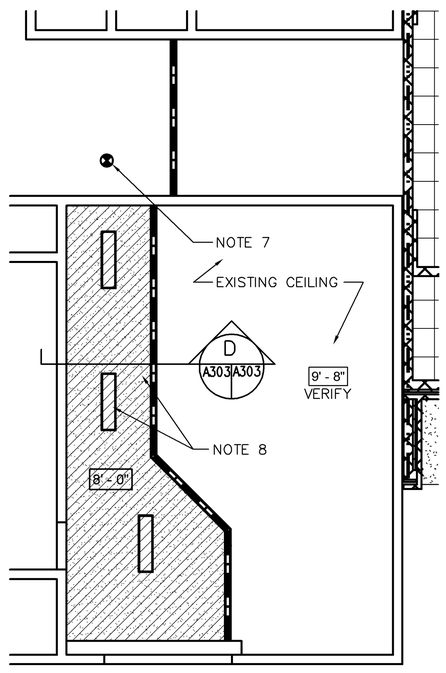

C A102 A303 — TEMP EXIT PASSAGEWAY ENLARGED REFLECTED CEILING PLAN
SCALE: 3/16" = 1'-0"

US ARMY CORPS OF ENGINEERS SAVANNAH

BY	DATE	DESCRIPTION	SYMBOL

DATE: 25 JAN 2010
SOLICITATION NO: W912HN-09-R-0018
CONTRACT NO:
CATEGORY CODE: 730 & 610
PLOT DATE:
DESIGNED BY: SCD
DRN BY: SCD/JDA
CKD BY: SCD
SUBMITTED BY:
FILE NAME:
SIZE: 34x22
PLOT SCALE:

U. S. ARMY ENGINEER DISTRICT CORPS OF ENGINEERS SAVANNAH DISTRICT

LS3P ASSOCIATES LTD. 205 KING STREET CHARLESTON, SC. 29401

ALBRITTON JUNIOR HIGH SCHOOL ADDITION
FT BRAGG NORTH CAROLINA

CONSTRUCTION EGRESS PLANS & DETAILS

PLATE REFERENCE NUMBER A-303
SHEET 49