REVISIONS			
SYM		DATE	APPROVED

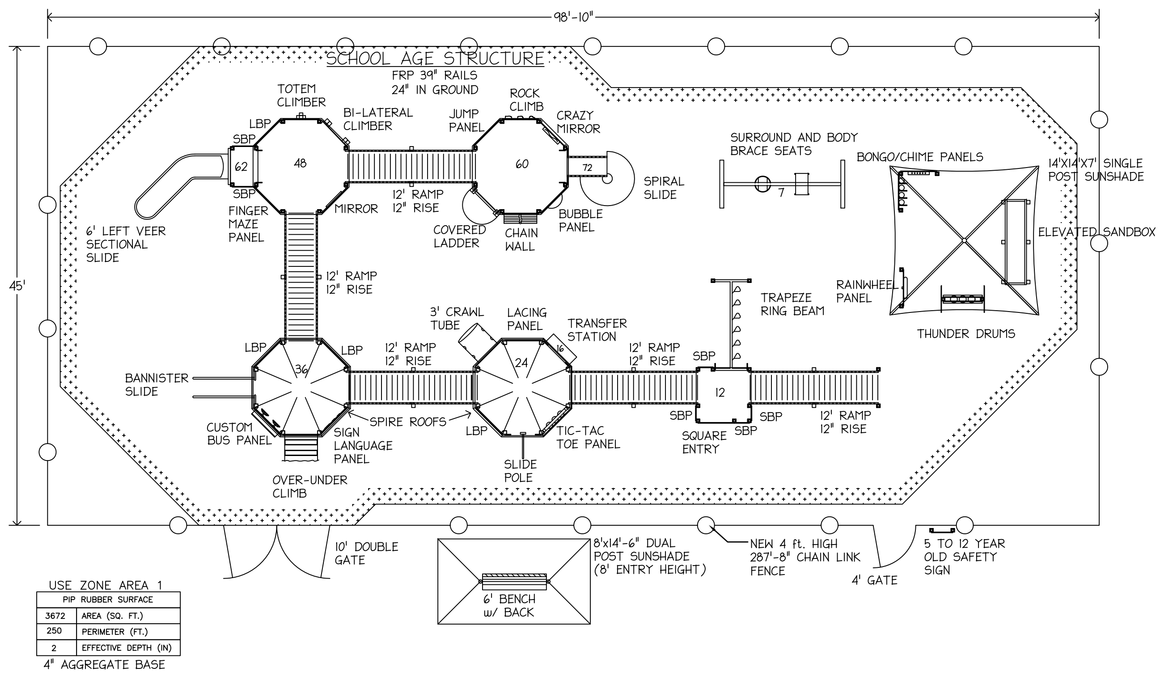

USE ZONE AREA 1	
PIP RUBBER SURFACE	
3672	AREA (SQ. FT.)
250	PERIMETER (FT.)
2	EFFECTIVE DEPTH (IN)

4" AGGREGATE BASE

TARAWA TERRACE

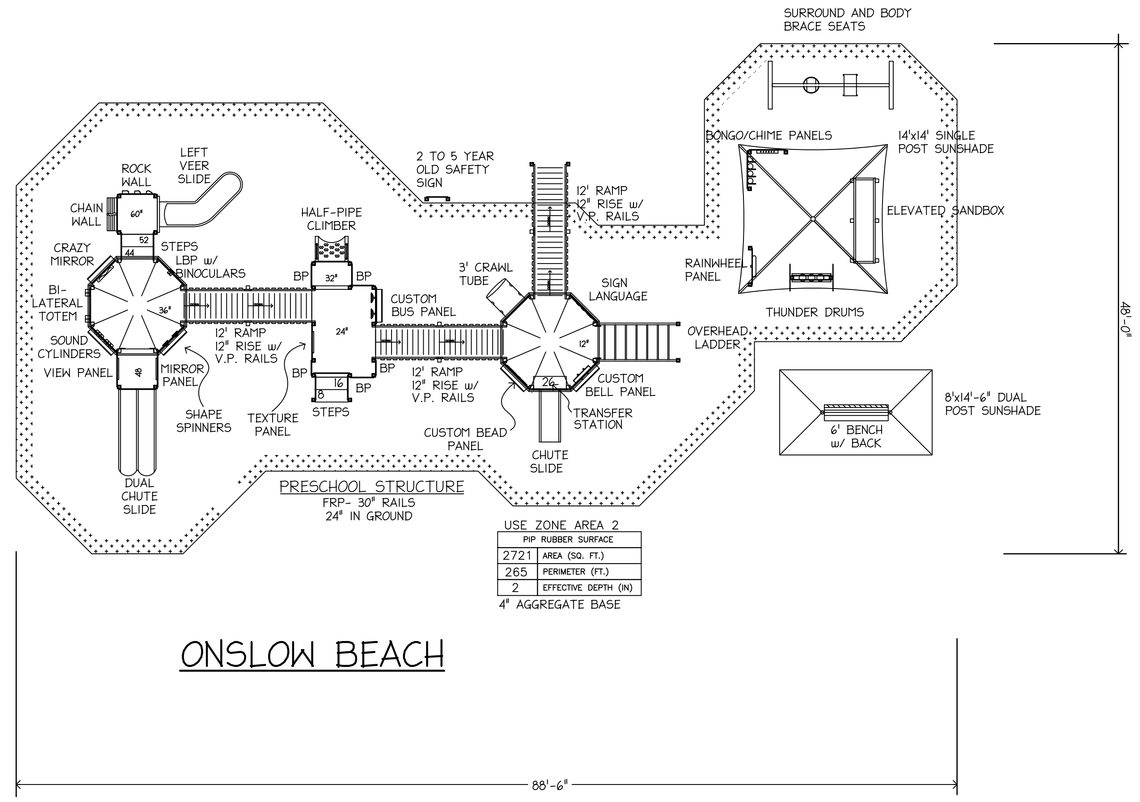

USE ZONE AREA 2	
PIP RUBBER SURFACE	
2721	AREA (SQ. FT.)
265	PERIMETER (FT.)
2	EFFECTIVE DEPTH (IN)

4" AGGREGATE BASE

ONSLOW BEACH

NOTES

1. PROVIDE PLAYGROUND EQUIPMENT, INSTALLATION, SURFACING, AND CONTAINMENT MATERIAL AS INDICATED AND LOCATED BELOW.
2. RUBBER SURFACING WILL BE INSTALLED WITHIN APPROPRIATE CONTAINMENT BORDERS. PLAYGROUND EQUIPMENT WILL BE PLACED, ANCHORED AND AFFIXED ON TOP OF POURED-IN-PLACE RUBBERIZED MATERIAL ON AN APPROVED BASE OR EXISTING CONCRETE SLAB WHERE INDICATED.
3. QUALITY: ALL MATERIAL MUST MEET OR EXCEED QUALITY AS INDICATED BY THE FOLLOWING:
   - A. LIFETIME WARRANTY; ALUMINUM COLUMNS, CLAMPS, CAPS, STEERING WHEELS, AND FIBERGLASS REINFORCED PLASTIC (FRP) POST.
   - B. 15 YEAR WARRANTY; ALTERNATIVE DECKING, RAILING, FENCING, AND TRIM PRODUCTS. PRODUCT WILL BE A COMBINATION OF RECYCLED PLASTIC AND WOOD PRODUCTS. OTHER PRODUCTS ARE PVC COATED METAL DECKING AND PRESSURE TREATED PINE COMPONENTS.
   - C. 10 YEAR WARRANTY; EXTRUDED PLASTIC COMPONENTS, ROTATIONALLY MOLDED SLIDES AND ROOFS.
   - D. 8 YEAR WARRANTY; ARTIFICIAL TURF
   - E. 2 YEAR WARRANTY; RUBBER SURFACING AND ALL OTHER PRODUCTS EXCEPT TARPS.
4. TARAWA TERRACE EQUIPMENT WILL INCLUDE: SCHOOL AGE STRUCTURE, (ENTIRE STRUCTURE WILL BE WHEELCHAIR ACCESSIBLE); SINGLE BAY SWING UNIT, (SINGLE FRAME WITH SURROUND SWING SEAT AND BODY BRACE SWING SEAT); ELEVATED SANDBOX, (2' X 8' ELEVATED SANDBOX); MUSIC INSTRUMENTS PANEL, CHIME AND BONGO PANELS); SHADE STRUCTURE, (14' X 14' SINGLE POST SHADE); FENCE, (288 LINEAR FEET OF 5 FT. HIGH 9 GAUGE BLACK VINYL CHAIN LINK FENCE WITH ONE 5' X 10' DOUBLE DRIVE GATE AND ONE 5' WALK GATE; SURFACING, (3,672 SQUARE FEET OF 2" THICK POURED IN PLACE RUBBER ON AGGREGATE BASE). PLAYGROUND AREA TO BE LOCATED ADJACENT TO AMCC HOUSING UNITS TT-5335, TT-5334 AND TT-5333 AT THE INTERSECTION OF INCHON STREET AND IWO JIMA BOULEVARD.
5. ONSLOW BEACH EQUIPMENT WILL INCLUDE: PRESCHOOL STRUCTURE, (MOST OF THE STRUCTURE WILL BE WHEELCHAIR ACCESSIBLE EXCEPT THE UPPER TWO DECKS WHICH WILL BE HANDICAPPED ACCESSIBLE); SINGLE BAY SWING UNIT, (SINGLE FRAME WITH SURROUND SWING SEAT AND BODY BRACE SWING SEAT); ELEVATED SANDBOX, (2' X 8' ELEVATED SANDBOX); MUSIC INSTRUMENTS, (DRUM, WHEEL PANEL, CHIME AND BONGO PANELS); SHADE STRUCTURE, (14' X 14' SINGLE POST SHADE); SURFACING WILL BE 2,721 SQUARE FEET OF 2" THICK POURED IN PLACE RUBBER OVER AN AGGREGATE BASE. LOCATION WILL BE AS DIRECTED AND LAYOUT AS INDICATED ON DRAWING.
6. MIDWAY PARK EQUIPMENT WILL INCLUDE: PLAYGROUND EQUIPMENT ON POURED-IN-PLACE RUBBER SURFACE ON EXISTING CONCRETE SLAB WHICH WILL BE ENLARGED BY 229 SQUARE FEET AS INDICATED. RUBBER SURFACE WILL HAVE APPROPRIATE CONTAINMENT BORDERS ON TOP OF CONCRETE BASE AND PLAYGROUND EQUIPMENT WILL BE ANCHORED TO THE CONCRETE BASE. EQUIPMENT WILL INCLUDE; 2-5 YEAR OLD STRUCTURE, (HALF OF THIS STRUCTURE WILL BE WHEELCHAIR ACCESSIBLE WITH THE OTHER PART BEING HANDICAPPED ACCESSIBLE); ELEVATED SANDBOX, (2' X 8') ELEVATED SANDBOX; MUSIC INSTRUMENTS, (DRUM, WHEEL PANEL, CHIME AND BONGO PANELS); SHADE STRUCTURE, (14' X 14' SINGLE POST SHADE); SINGLE BAY SWING UNIT, (SINGLE FRAME WITH SURROUND SWING SEAT AND BODY BRACE SWING SEAT). SURFACE WILL BE 1,429 SQUARE FEET OF 2" THICK POURED-IN-PLACE RUBBER. NEW CONCRETE ADDITION TO BE 4" ON BASE.
7. FOR BID PURPOSE ASSUME EXISTING SLOPE IS LESS THAN 3% AND ONLY MINIMAL GRADING IS NEEDED.
8. APPROPRIATE FALL ZONES ARE REQUIRED FOR ALL ELEVATED AND SWING AREAS.
9. PROVIDE 4' HIGH GALVINAL COATED CHAIN LINK FENCE IN LENGTH AND LOCATION INDICATED. INSTALL NEW GATES IN SIZES AND LOCATIONS INDICATED.

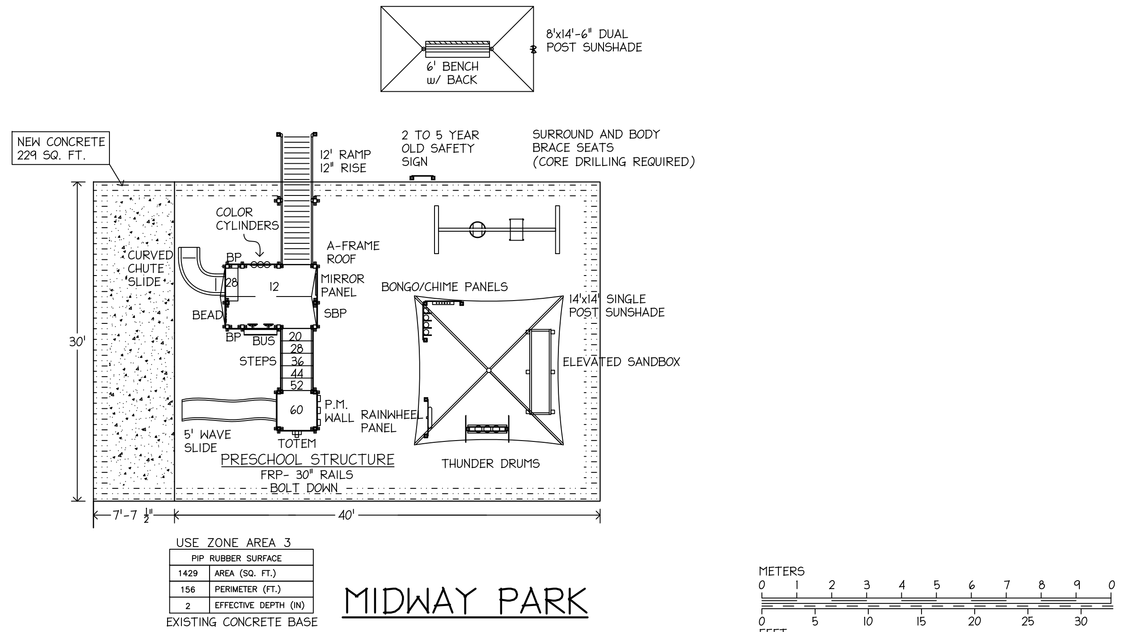

USE ZONE AREA 3	
PIP RUBBER SURFACE	
1429	AREA (SQ. FT.)
156	PERIMETER (FT.)
2	EFFECTIVE DEPTH (IN)

EXISTING CONCRETE BASE

MIDWAY PARK

METERS
0 1 2 3 4 5 6 7 8 9 0
0 5 10 15 20 25 30
FEET

A-1

DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING COMMAND

MARINE CORPS BASE
CAMP LEJEUNE, NORTH CAROLINA

DES. AL SAMUEL
DR. C GATEWAY
CHK. AL SAMUEL
SUBMITTED BY: AL SAMUEL
DESIGN DIR.
APPROVED: PWO OR OICC DATE
SATISFACTORY TO: DATE

EXCEPTIONAL FAMILY MEMBER HANDICAP PLAYGROUND
SITE PLANS AND NOTES

SIZE F | CODE IDENT. NO 80091 | NAVFAC DRAWING NO. 60002002
CONST. CONTR. NO. N40085-08-B-0155
SCALE: NOTED | SPEC. 05-08-0155 | SHEET 1 OF 1