KEYED NOTES

1. EXISTING CONCRETE WALK TO BE REMOVED. SEE CIVIL DRAWINGS.
2. EXISTING PRECAST CONC PANELS AT COVERED ENTRY TO BE REMOVED. SEE DEMOLITION PLAN.
3. EXISTING GYPSUM BOARD SOFFIT & FRAMING TO BE REMOVED.
4. REMOVE EXISTING ROOFING SYSTEM, METAL DECK, STEEL FRAMING, EAVE, ETC AT COVERED ENTRY.
5. REMOVE EXISTING ROOFING SYSTEM DOWN TO METAL DECK WHERE NEW ROOF FRAMING OVERLAPS EXISTING ROOF.
6. REMOVE EXISTING ASPHALT SHINGLES AS REQUIRED TO LAP NEW UNDERLAYMENT UNDER EXISTING UNDERLAYMENT.
7. FINISH GRADE VARIES. SEE CIVILE DRAWINGS.
8. REMOVE EXISTING HOLLOW METAL FRAME, DOORS & METAL STUD WALL ABOVE.
9. EXISTING STEEL JOISTS & BEAM TO REMAIN.
10. REMOVE EXISTING ACOUSTICAL CEILING TILE & METAL SUSPENSION SYSTEM AT VESIBULE & AS REQUIRED AT EXISTING CORRIDOR FOR REMOVAL OF HOLLOW METAL FRAME & WALL.
11. EXTEND EXISTING FIRE RATED GYPSUM BOARD BARRIER & BATT INSUL TO NEW FIRE WALL. NEW WORK TO MATCH EXISTING.
12. EXTEND EXISTING SUSPENDED ACOUSTICAL CEILING TO NEW FIRE WALL. NEW WORK TO ALIGN & MATCH EXISTING.
13. CMU BOND BEAM. STEP BOND BEAM & SAWCUT CMU TO FOLLOW ROOF SLOPE. MAINTAIN 1" CLEARANCE BETWEEN CMU & ROOF DECK. SEE STRUCTL DWGS.
14. PACK JOINT BETWEEN CMU & MTL DECK, THEN FILL VOIDS IN DECK FLUTES. COMPRESS INSUL APPROX 50% AND FILL JOINT/VOIDS COMPLETELY.
15. EXISTING CONCRETE FLOOR SLAB. REPAIR ANY EXISTING TERRAZZO DAMAGED BY DEMOLITION.
16. 3/4"x 1" HIGH TYPE "T" MTL REVEAL MOLDING. PAINT TO MATCH STUCCO.

GRAPHIC SCALE

0 1' 2' 3'

3/4" = 1'-0"

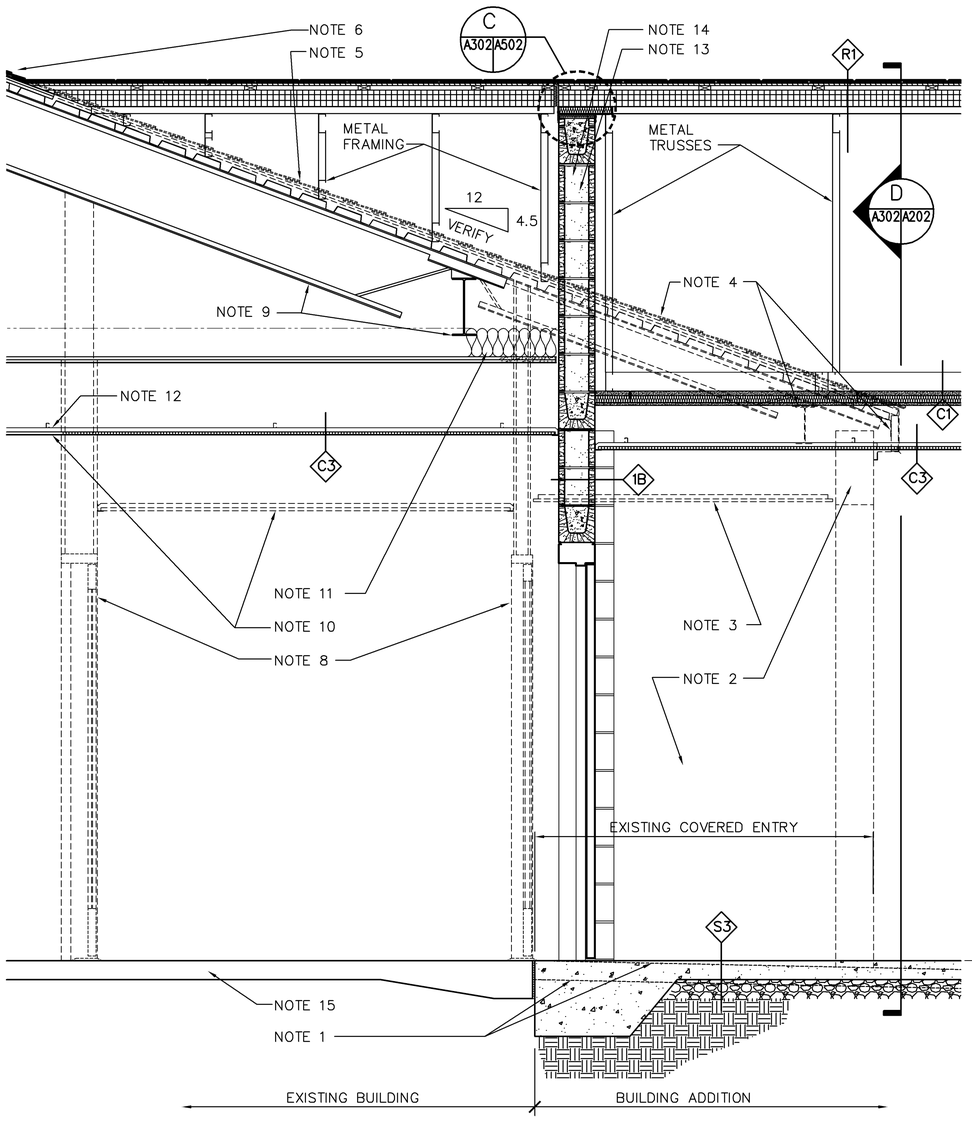

A SECTION @ FIRE WALL
AD101|A302 A202
SCALE: 3/4" = 1'-0"

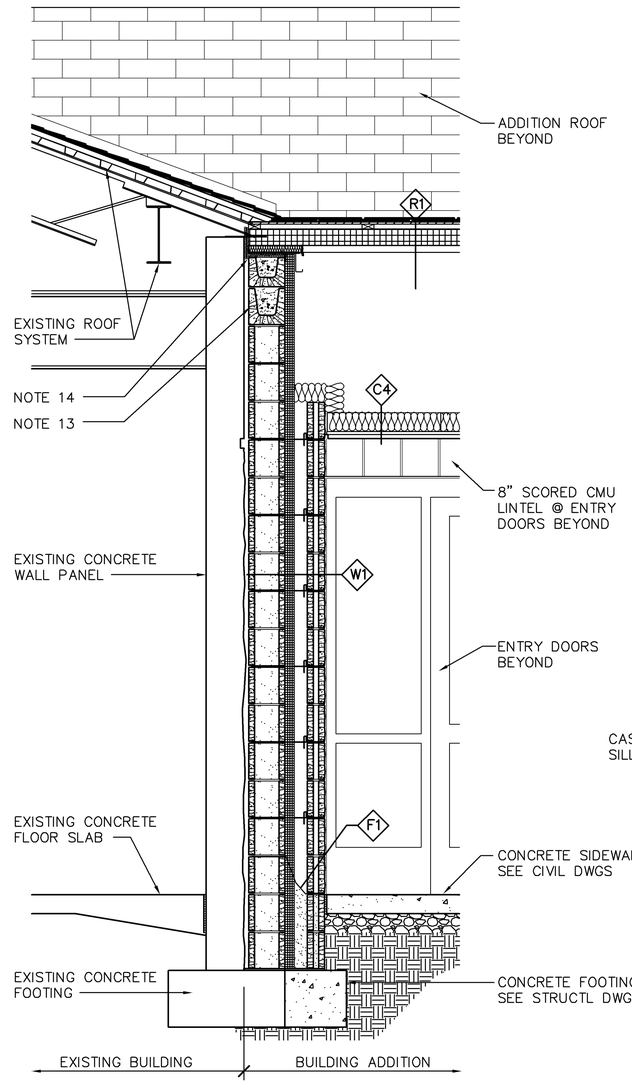

B SECTION @ FIRE WALL
A202|A302
SCALE: 3/4" = 1'-0"

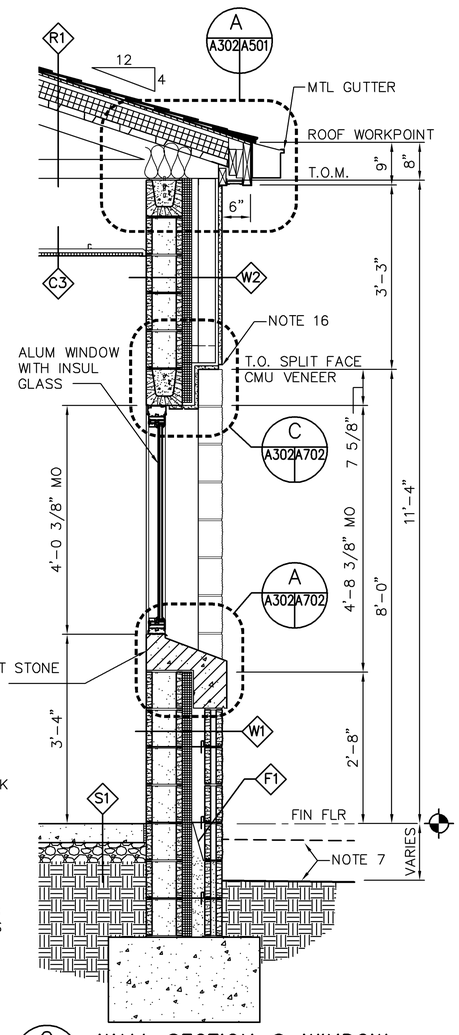

C WALL SECTION @ WINDOW
A201|A302 A202
SCALE: 3/4" = 1'-0"

US ARMY CORPS OF ENGINEERS SAVANNAH

BY	DATE	DESCRIPTION	SYMBOL

DATE: 25 JAN 2010
SOLICITATION NO.: W912HN-09-R-0018
CONTRACT NO.:
CATEGORY CODE: 730-46-01
PLOT DATE:
DESIGNED BY: SCD
DWN BY: SCD/JDA
CKD BY: SCD
SUBMITTED BY:
FILE NAME:
PLOT SCALE:
SIZE: 34x22

U. S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH DISTRICT

LS3P ASSOCIATES LTD.
205 ½ KING STREET
CHARLESTON, SC, 29401

ALBRITTON JUNIOR HIGH SCHOOL ADDITION
FT BRAGG NORTH CAROLINA

WALL SECTIONS

PLATE REFERENCE NUMBER
A-302
SHEET 48